
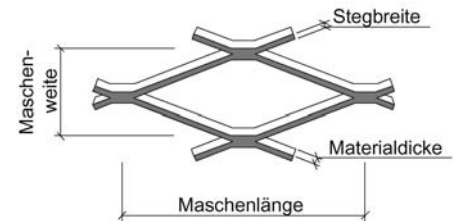


VESMETAL

Masche: (R) 100 x 50

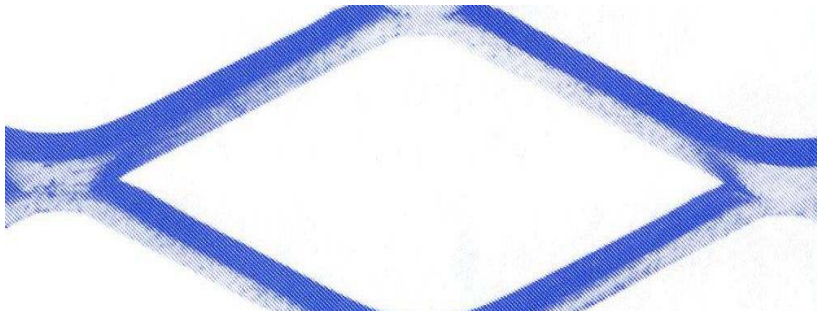

aus Stahlblech (Materialdicke: 1,5 - 5,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
10050/3015	100	50	3,0	1,5		X	X	88%	1,44
10050/3020	100	50	3,0	2,0		X	X	88%	1,92
10050/12020	100	50	12,0	2,0		X	X	52%	7,66
10050/3030	100	50	3,0	3,0		X	X	88%	2,88
10050/4530	100	50	4,5	3,0		X	X	82%	4,32
10050/7040	100	50	7,0	4,0		X	X	72%	8,94
10050/9040	100	50	8,0	4,0		X	X	68%	10,23
10050/8050	100	50	8,0	5,0		X	X	68%	12,78
10050/12050	100	50	12,0	5,0		X	X	52%	19,14

aus Aluminium (Materialdicke: 1,5 - 6,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
10050/3015	100	50	3,0	1,5		X	X	88%	0,49
10050/3020	100	50	3,0	2,0		X	X	88%	0,65
10050/12020	100	50	12,0	2,0		X	X	52%	2,59
10050/3030	100	50	3,0	3,0		X	X	88%	0,98
10050/4530	100	50	4,5	3,0		X	X	82%	1,46
10050/7040	100	50	7,0	4,0		X	X	72%	3,02
10050/9040	100	50	8,0	4,0		X	X	68%	3,46
10050/8050	100	50	8,0	5,0		X	X	68%	4,32
10050/12050	100	50	12,0	5,0		X	X	52%	6,46
10050/10060	100	50	10,0	6,0		X	X	60%	6,48

aus Edelstahl 1.4301 (Materialdicke: 1,5 – 4,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
10050/3015	100	50	3,0	1,5		X	X	88%	1,44
10050/3020	100	50	3,0	2,0		X	X	88%	1,92
10050/12020	100	50	12,0	2,0		X	X	52%	7,66
10050/3030	100	50	3,0	3,0		X	X	88%	2,88
10050/4530	100	50	4,5	3,0		X	X	82%	4,32
10050/7040	100	50	7,0	4,0		X	X	72%	8,94
10050/9040	100	50	8,0	4,0		X	X	68%	10,23

aus Kupfer (Materialdicke: 1,5 – 5,0mm / max. Tafelbreite: 2500mm)

Kurzbezeichnung Bestell-Nr.	Maschen- länge mm L	Maschen- weite mm W (±5%)	Stegbreite mm B (±5%)	Material- dicke mm A (±10%)	Streckgitter- dicke mm D	Streckgitterbreiten (max.) ± 10%		freier Quer- schnitt	Gewicht Kg/m ² ≙
						1250	2500		
10050/3015	100	50	3,0	1,5		X	X	88%	1,61
10050/3020	100	50	3,0	2,0		X	X	88%	2,14
10050/12020	100	50	12,0	2,0		X	X	52%	8,52
10050/3030	100	50	3,0	3,0		X	X	88%	3,21
10050/4530	100	50	4,5	3,0		X	X	82%	4,81
10050/7040	100	50	7,0	4,0		X	X	72%	9,95
10050/8050	100	50	8,0	5,0		X	X	68%	14,22

Alle Angaben unter jeglichen Vorbehalt !!!